THS/S 0-100°C Surface-mount thermostat


Technical sheet THS/S 0-100°C V1



Specifications

Weatherproof enclosure – IP66 protection
Dimensions: 130 x 130 x 73 mm
16 A / 230 V thermostat unit
Contact: potential-free changeover relay
Standard temperature range: 0–100°C
Capillary protected by SC/FLEX flexible conduit: 50 cm
Maximum probe temperature: 125°C
Probe diameter: 6 mm
Maximum probe length: 150 mm
Maximum capillary length: 105 cm
Thermostat can be mounted on piping using the T/SCS support tube
Mounting on insulation cladding or on a wall using the EQ/FIX mounting bracket

Wiring diagram

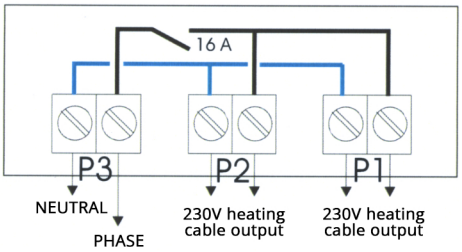

Maxi 16 A
Braid on flying terminal



Avenue du Général de Gaulle
89130 TOUCY - FRANCE
Tél : +33(0)3 86 44 06 06
Email : info@technitrace.fr

www.technitrace.fr